

AXOR Montreux

Thermostat for concealed installation with cross handle and shut-off/ diverter valve

Finish: **Brushed Nickel** Article Number: **16820820**




product features

- 2 functions
- T32, AuV 26
- maximum flow rate at 3 bar: 29 l/min
- flow rate upper outlet: 25 l/min
- flow rate lower outlet: 29 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- Safety stop at 40 °C
- temperature limitation adjustable
- non-return valve
- with silencer
- connection type: basic set

Product image



Scale drawing

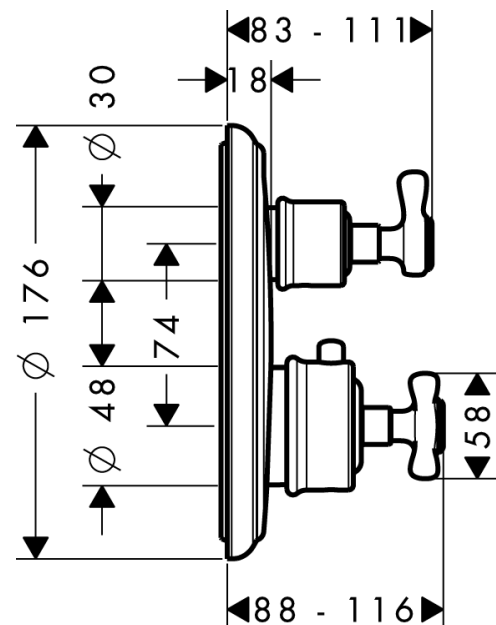


AXOR Montreux

Thermostat for concealed installation with cross handle and shut-off/ diverter valve

Finish: **Brushed Nickel** Article Number: **16820820**



Flowchart

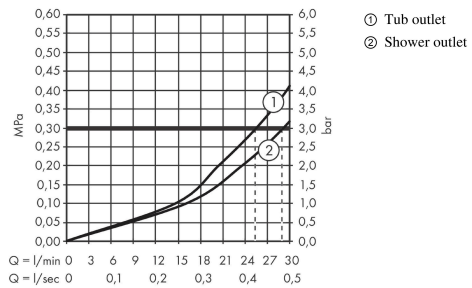

AXOR Montreux


Thermostat for concealed installation with cross handle and shut-off/ diverter valve

Finish: **Brushed Nickel** Article Number: **16820820**



Exploded Drawing

Year of production: >03/10

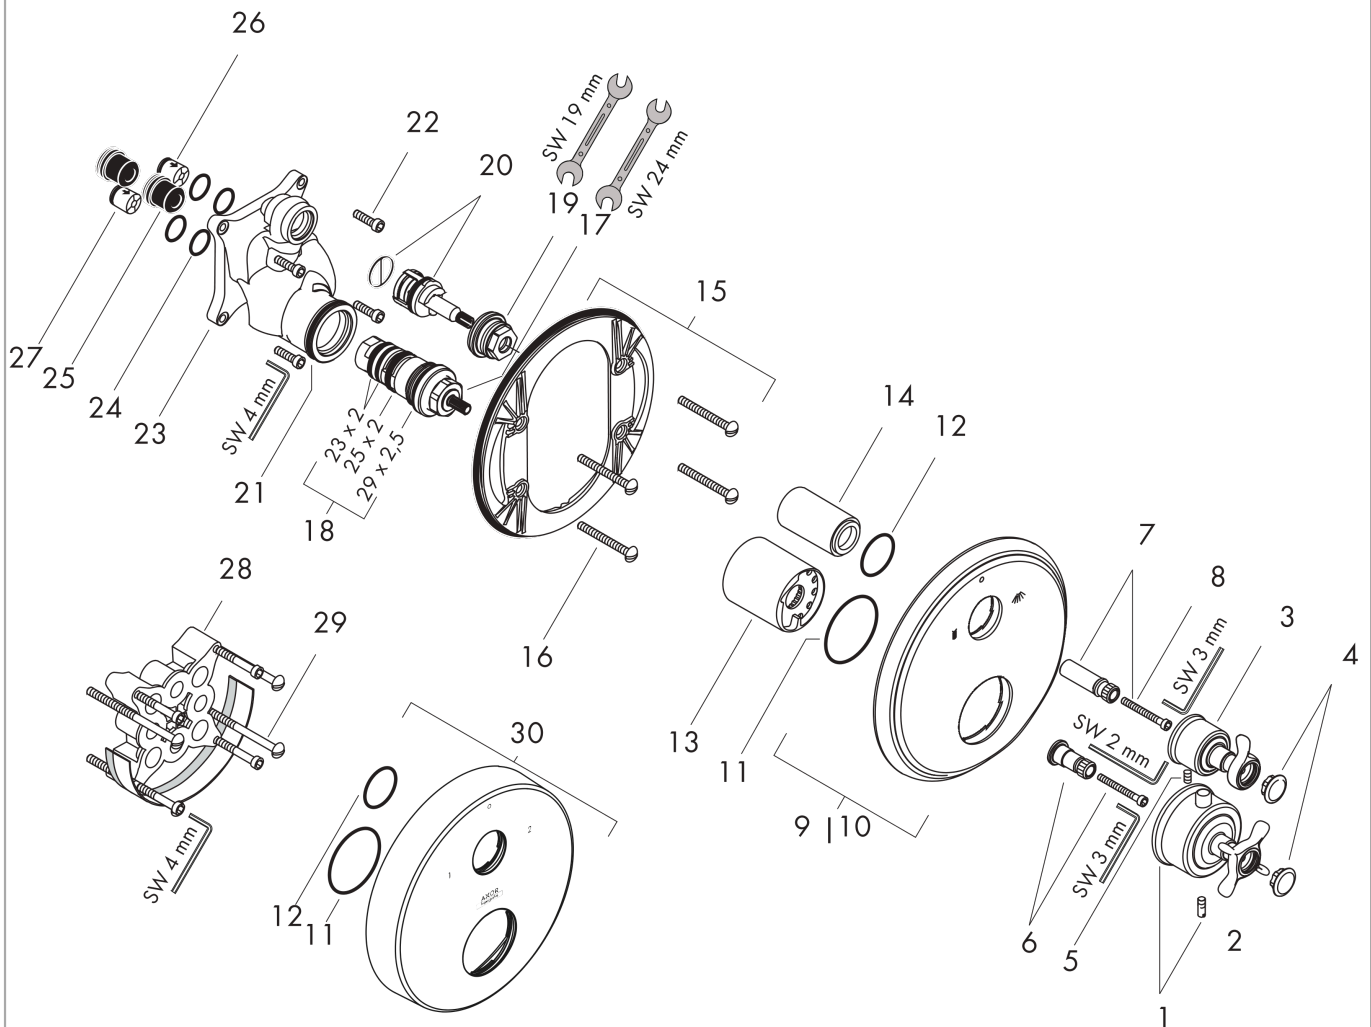

AXOR Montreux

Thermostat for concealed installation with cross handle and shut-off/ diverter valve

Finish: **Brushed Nickel** Article Number: **16820820**



Spare part list

Year of production: >03/10

Pos.		Article Number	PC	PU
1	handle for thermostat	16594820	18	1
2	hollow set screw M5x16	97666000	1	1
3	handle	98637820	16	1
4	set of screw covers, cold / hot water / neutral	97987000	11	1
5	hollow set screw M4x8	97669000	1	1
6	adapter for handle	96435000	6	1
7	adapter for handle	96451000	5	1
8	hexagon socket screw M4x35	92160000	1	1
9	escutcheon	98638820	16	1
10	escutcheon for exchanged connections	95829820	16	1
11	O-Ring 48x3	95508000	1	1
12	O-ring 29x3	98371000	2	1
13	sleeve	96439820	11	1
14	sleeve	96446820	10	1
15	sub plate	96447000	10	1
16	set of fixing screws	96454000	3	1
17	thermostat cartridge	94282000	15	1
18	sealing set	95037000	10	1
19	nut	92853000	3	1
20	shut off unit with selector	96509000	13	1
21	O-ring 39x2	98158000	1	1
22	set of screws	96525000	3	1
23	installation unit cpl.	92591000	19	1
24	O-ring 16x2	98133000	1	1
25	noise reduction	94073000	7	1
26	set of non return valves DW 15	94074000	5	1
27	non return valve (pressure-resistant up to 2 MPa)	92594000	5	1
28	extension 25 mm	13595000	99	1
29	set of fixing screws	97747000	1	1
30	escutcheon height = 33 mm (when wall is not deep enough).	14962820	99	1
a	pushbutton	97792820	7	1
b	adapter for exchanged connections	93181000	18	1
c	concealed item	01800180	99	1